

YANX FORKLIFT / 2026 PRODUCT RANGE

Electric Forklifts & Warehouse Equipment


Explore 16 product families across five categories for lifting, stacking and pallet movement.

**ELECTRIC FORKLIFTS****REACH / VNA****WAREHOUSE HANDLING**

ABOUT YANX

Close to the manufacturing team.

YanX helps overseas buyers choose and configure electric forklifts and warehouse equipment through direct work with the manufacturing team in Jiangsu, China.

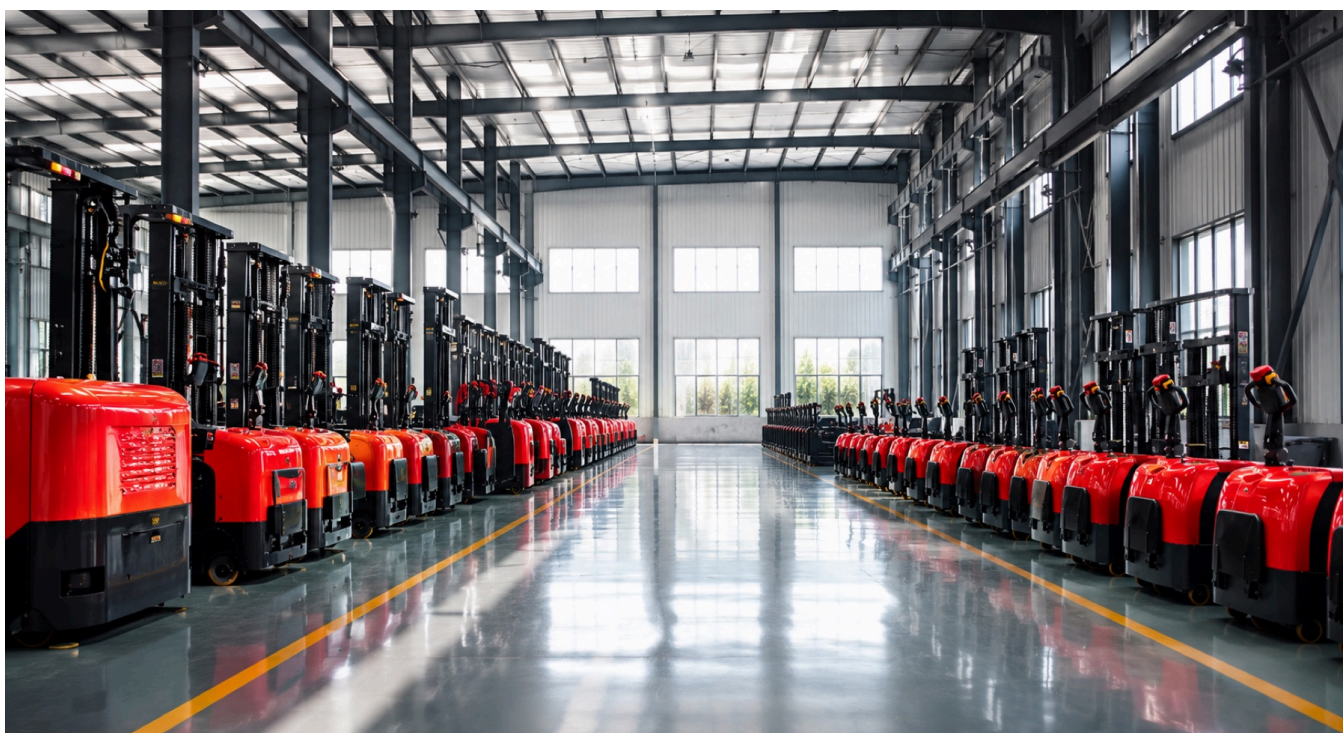

YanX Forklift is an export-facing brand working directly with an established forklift manufacturing team in Jiangsu, China.

We coordinate configurations, quotations and export orders with that team. Product figures in this catalog reflect current YanX website listings; final model-specific details are confirmed in the quotation.

Direct communication

Equipment questions reviewed with the manufacturing team.

Practical configuration

Load, lift height, aisle width and operating conditions guide selection.

Export coordination

Packing, documents and shipment planning for the quoted order.

01 / ELECTRIC FORKLIFTS

Counterbalance choices.

Three-wheel, four-wheel and stand-on families for pallet movement in warehouses, factories and logistics sites.

**THREE-WHEEL / CPD****CPD Three-Wheel Counterbalance Electric Forklift**

Seated steering-wheel truck; choose front- or rear-drive series.

RATED CAPACITY 1,000 to 2,000 kg, depending on series

Standard lift 3,000 mm

Battery Front-drive: 48 V / 140 Ah; Rear-drive: 24 V / 240 Ah

**FOUR-WHEEL / CPD****CPD Four-Wheel Counterbalance Electric Forklift**

Seated four-wheel truck for warehouse and factory loads.

RATED CAPACITY 1,500 / 2,000 / 3,000 kg

Standard lift 3,000 mm

Battery CPD1530: 48 V / 140 Ah; CPD2030: 60 V / 280 Ah; CPD3030: 48 V / 420 Ah

**STAND-ON / CPDS****CPDS Stand-On Counterbalance Electric Forklift**

Stand-on tiller platform for frequent pallet handling.

RATED CAPACITY 1,000 / 1,500 / 2,000 kg

Standard lift 3,000 mm

Battery 24 V / 180 or 210 Ah

02 / VNA FORKLIFTS

Work within narrow aisles.

The CQDZM three-way family brings pallet positioning into high-density storage plans.

**SEATED THREE-WAY / CQDZM20**

CQDZM Seated VNA Three-Way Electric Forklift

Seated three-way fork positioning for very narrow aisles.

NOMINAL RATED CAPACITY 2,000 kg

Specified max lift 6,000 mm

Battery 48 V / 400 Ah

This is not residual capacity at maximum lift height. Confirm residual capacity for the selected mast and load before ordering.

Aisle geometry

Share usable aisle width and rack layout.

Load details

Confirm pallet dimensions and load center.

Lift requirement

State the highest working level for review.

03 / REACH TRUCKS

Reach higher, use space well.

Stand-on, seated and compact counterbalance reach configurations for racking and warehouse pallet flow.

**STAND-ON / CQDS****CQDS Stand-On Reach Truck**

Stand-on, steering-wheel reach truck for rack access.

RATED CAPACITY 1,000 / 1,500 / 2,000 kg

Standard lift 3,000 mm

Battery 24 V / 280 Ah


**SEATED / CQDZ****CQDZ Seated Reach Truck**

Seated reach truck for frequent high-rack pallet work.

RATED CAPACITY 1,500 / 2,000 kg

Standard max lift 3,000 mm

Battery 48 V / 400 Ah

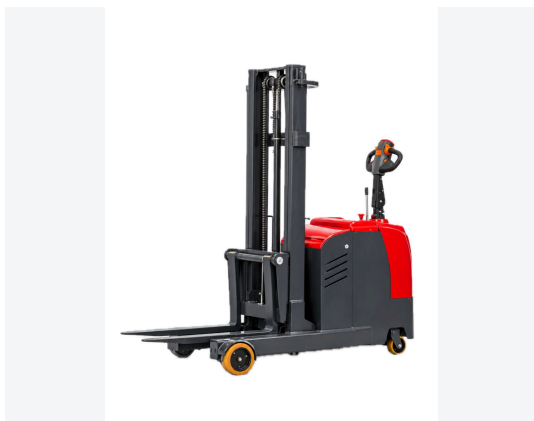**COUNTERBALANCE / CQD****CQD Counterbalance Reach Truck**

Stand-on, tiller-handle counterbalance reach design.

RATED CAPACITY 1,000 / 1,500 / 2,000 kg

Standard lift 3,000 mm

Battery 24 V / 180 or 210 Ah

04 / STACKER TRUCKS

Everyday electric stacking.

Four stacker families with distinct operating positions, support-leg layouts and lift configurations.



INITIAL LIFT / CDDA

CDDA Electric Stacker with Initial Lift

Pedestrian stacker with powered travel, lift and raised support arms.

Rated capacity 1,500 kg

Max fork lift 2,980 mm

Battery 48 V / 32 Ah lead-acid



COMPACT / CDDA

CDDA Compact Fully Electric Stacker

Stand-on tiller stacker with a 1,150 mm turning radius.

Rated capacity 1,000 / 1,500 kg

Standard lift 3,000 mm

Battery 24 V / 100 or 120 Ah



WALKIE / CDDB

CDDB Walkie Fully Electric Stacker

Pedestrian tiller stacker for indoor pallet work.

Rated capacity 1,000 / 1,500 kg

Standard lift 3,000 mm

Battery 24 V / 100 Ah



STRADDLE / CDD

CDD Fully Electric Straddle Stacker

Pedestrian tiller stacker with support legs outside the load.

Rated capacity 1,000 / 1,500 / 2,000 kg

Max lift 3,000 mm

Battery 24 V / 120 or 180 Ah

04 / STACKER TRUCKS - CONTINUED

Options for different sites.

Rough-terrain and semi-electric families expand the pallet-stacking range.

**ROUGH-TERRAIN / CDD****CDD Rough-Terrain Fully Electric Stacker**

Stand-on tiller stacker with 130 mm ground clearance.

RATED CAPACITY 1,000 / 1,500 kg

Standard lift 1,600 mm

Battery 24 V / 80 Ah

**SEMI-ELECTRIC / CDS****CDS Semi-Electric Straddle Stacker**

Pedestrian design with straddle legs for flexible pallet access.

RATED CAPACITY 1,000 / 1,500 kg

Standard lift 3,000 mm

Battery 12 V / 120 Ah

**SEMI-ELECTRIC / CDS****CDS Semi-Electric Pallet Stacker**

Pedestrian pallet stacker with electric lifting and 800 mm overall width.

RATED CAPACITY 1,000 / 1,500 kg

Standard lift 3,000 mm

Battery 12 V / 120 Ah

05 / PALLET TRUCKS

Move and position loads.

Powered pallet transport and a specialist pallet-rotation family for material flow.

**TRANSPORT / CBD**

CBD Stand-On Fully Electric Pallet Truck

Stand-on tiller truck for horizontal pallet transport.

RATED CAPACITY 2,000 / 3,000 kg

Lift height 200 mm

Battery 24 V / 120 or 180 Ah

**SPECIAL HANDLING / CDD**

CDD Fully Electric Pallet Rotator

Stand-on tiller truck for lifting and rotating palletized loads.

RATED CAPACITY 1,500 kg

Lift height 1,400 mm

Battery 24 V / 180 or 210 Ah

WHERE THE RANGE WORKS

Start with the application.

The best equipment choice begins with the load, site and working pattern. These existing YanX product photographs show representative equipment.

**General pallet handling**

Counterbalance trucks for warehouse and factory flows.

**High-rack storage**

Reach and VNA families for rack and aisle plans.

**Stacking and staging**

Pedestrian equipment for pallet lifting and short moves.

**Horizontal transport**

Powered pallet trucks for movement between work areas.

For a useful shortlist, share load weight and dimensions, lift height, aisle width, floor condition and daily operating hours.

BEFORE AND AFTER DELIVERY

Support that follows the order.

YanX works with the manufacturing team to clarify equipment and service details for overseas buyers.

**Quality & pre-delivery**

We confirm which checks apply to the selected truck and whether inspection details or records can be provided before the order is finalized.

Warranty & technical questions

Warranty terms are clarified before order confirmation. YanX helps coordinate questions using the model, serial number and clear photos or video.

Spare parts

Share the model, serial number and part needed. We help identify a suitable replacement and confirm availability, pricing and shipping options.

Documentation & export

We help confirm available manuals and export documents for the selected model and destination alongside packing and shipping arrangements.

PRODUCT SELECTION

Match the truck to the job.

Start with load, lift height, aisle space and operating position. Then compare the linked product pages for model-specific details.

A PRACTICAL FIRST SHORTLIST

Five categories. Different handling tasks.

Use the website-reference figures below to narrow the equipment family before confirming a configuration.

FAMILY	CHOOSE FOR	WEBSITE-REFERENCE FIGURES	PAGE
Electric forklifts	Counterbalance lifting; seated or stand-on	1,000–3,000 kg across three families; 3,000 mm standard lift	03
VNA	Very narrow aisles and high racks	2,000 kg nominal rating; 6,000 mm specified maximum lift	04
Reach trucks	Rack access with stand-on or seated operation	1,000–2,000 kg across three families; 3,000 mm standard lift	05
Stackers	Pedestrian, stand-on, straddle and semi-electric choices	1,000–2,000 kg across seven families; lift figures vary by family	06–07
Pallet handling	Horizontal transport or pallet rotation	CBD 2,000 / 3,000 kg at 200 mm; CDD rotator 1,500 kg at 1,400 mm	08

Rated capacities are nominal website values; they do not state residual capacity at a raised lift height.

NEXT STEP

Discuss your requirements.

Tell YanX about your load and site. We will help specify a suitable configuration and prepare a quotation with the manufacturing team.

**REQUEST A QUOTATION**

Tell us what the truck needs to do.

Include load weight and dimensions, maximum lift height, aisle width, floor conditions, daily operating hours, attachments and destination. We will use those details to prepare a model-specific quotation.

EMAIL

sales@yanx-forklift.com

WEBSITE

yanx-forklift.com/contact/

WHATSAPP

+86 182 2135 8606